

RED-EMC Test Report

For

High-Flying Electronics Technology Co., Ltd.

WIFI Module

Model No.: HF-A11

Prepared For : High-Flying Electronics Technology Co., Ltd.
Address : Room 1002, Building 1, No.3000, Longdong Avenue, Pudong New Area,
Shanghai, 201203, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217050104E
Date of Test : May 27~Jun. 13, 2017
Date of Report : Jun. 13, 2017

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	6
1.5. Test Equipment List.....	7
1.6. Measurement Uncertainty.....	8
1.7. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Emission Test.....	10
3.1. Conducted Emission Test at Main Ports.....	10
3.1.1. Test Standard and Limit.....	10
3.1.2. Test Setup.....	10
3.1.3. Test Procedure.....	11
3.1.4. Test Data.....	11
3.2. Radiated Emission Test.....	16
3.2.1. Test Standard and Limit.....	16
3.2.2. Test Setup.....	17
3.2.3. Test Procedure.....	17
3.2.4. Test Data.....	18
4. Immunity Test.....	24
General Performance Criteria.....	24
4.1. Electrostatic Discharge Test.....	25
4.1.1. Test Standard and Specification.....	25
4.1.2. Test Setup.....	25
4.1.3. Test Procedure.....	26
4.1.4. Test Data.....	26
4.2. Radiated, RF Electromagnetic Fields Test.....	27
4.2.1. Test Standard and Specification.....	27
4.2.2. Test Setup.....	27
4.2.3. Test Procedure.....	27
4.2.4. Test Data.....	28
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	29
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	31
APPENDIX III -- INTERNAL PHOTOGRAPH.....	32

TEST REPORT

Applicant : High-Flying Electronics Technology Co., Ltd.
Manufacturer : High-Flying Electronics Technology Co., Ltd.
Product Name : WIFI Module
Model No. : HF-A11
Trade Mark : Hi-Flying
Rating(s) : DC 3.3V, 170~300mA

Test Standard(s) : ETSI EN 301 489-1 V2.1.1 (2017-02)
ETSI EN 301 489-17 V3.1.1 (2017-02)

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 301 489-1, EN 301 489-17 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : May 27~Jun. 13, 2017

Prepared By :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Amy Ding

(Project Manager / Amy Ding)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	High-Flying Electronics Technology Co., Ltd.
Address	:	Room 1002, Building 1, No.3000, Longdong Avenue, Pudong New Area, Shanghai, 201203, China
Manufacturer	:	High-Flying Electronics Technology Co., Ltd.
Address	:	Room 1002, Building 1, No.3000, Longdong Avenue, Pudong New Area, Shanghai, 201203, China

1.2. Description of Device (EUT)

Product Name	:	WIFI Module	
Model No.	:	HF-A11	
Trade Mark	:	Hi-Flying	
Test Power Supply	:	AC 110V, 50Hz for adapter/AC 230V, 50Hz for adapter	
Product Description	:	Operation Frequency:	2412MHz ~ 2472MHz
		Transfer Rate:	802.11b:11/5.5/2/1Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n: up to 150Mbps
		Number of Channel:	13 Channels
		Modulation Type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
		Antenna Type:	Chip Antenna
		Antenna Gain(Peak):	0.8 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: Shanghai jun peng electronics co., LTD Model No.: JP-015 Input: AC 100-265V, 50/60Hz, 0.4A Output: DC 5V, 1A
PC	:	Manufacturer: DELL M/N: Optiplex 3020 MT S/N: CN-079V51-70163-4AD-089K-A00 Input Rating: AC 100-240V, 50-60Hz 5.4A CE , FCC DOC, CCC
MONITOR	:	Manufacturer: DELL M/N: UZ2215Hf S/N: CN-035VN6-72872-45A-A3AB Input Rating: AC 100-240V, 50-60Hz, 1.5A Output Rating: DC 19.5V, 4.62A TUV-GS FCC CE KCC VCCI
KEYBOARD	:	Manufacturer: DELL M/N: SK-8120 S/N: CN-0DJ365-71616-49J-0MVR-A00 Input Rating: DC 5V,0.05A CE FCC VCCI KCC TUV-GS Cable: 1.8m, unshielded
MOUSE	:	Manufacturer: DELL M/N: MS111-T S/N: CN-0KW2YH-71616-488-1CBJ Input Rating: DC 5V,0.1A Cable: 1.8m, unshielded CE FCC VCCI KCC TUV-GS
Power Line	:	Non-Shielded, 1.5m
VGA Cable	:	Non-Shielded, 1.5m

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Mode

1.5. Test Equipment List

Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Jul. 19, 2016	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Jun. 17, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Jun. 17, 2016	1 Year

Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Jun. 17, 2016	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 06, 2017	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Jun. 17, 2016	1 Year

Electrostatic Discharge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	3ctest	ESD-30T	ES0131505	Jun. 17, 2016	1 Year

R/S Immunity Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	RF Power Meter. Dual Channel	BOONTON	4232A	10539	May 29, 2017	1 year
2.	50ohm Diode Power Sensor	BOONTON	51011EMC	34236/34238	May 29, 2017	1 year
3.	Broad-Band Horn Antenna	SCHWARZBECK	BBHA9120 L3F	332	May 29, 2017	1 year
4.	Power Amplifier	PRANA	AP32MT215	N/A	May 29, 2017	1 year
5.	Power Amplifier	MILMEGA	AS0102-55	N/A	May 29, 2017	1 year
6.	Signal Generator	AEROFLEX	2023B	N/A	May 29, 2017	1 year
7.	Field Strength Meter	HOLADAY	HI-6005	N/A	May 29, 2017	1 year
8.	RS232 Fiber Optic Modem	HOLADAY	HI-4413P	N/A	May 29, 2017	1 year
9.	Log.-Per. Antenna	SCHWARZBECK	VULP 9118E	N/A	May 29, 2017	1 year

1.6. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, June 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited.

1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results

EMC Emission				
Test Items	Standard	Basic Standard	Limit	Results
Conducted Emission	ETSI EN 301 489-1 V2.1.1 Clause 8.3 & 8.4	EN 55032: 2015	Class A or B NOTE (2)	PASS
Radiated Emission	ETSI EN 301 489-1 V2.1.1 Clause 8.2	EN 55032: 2015	Class A or B NOTE (2)	PASS
Harmonic Current Emission	ETSI EN 301 489-1 V2.1.1 Clause 8.5	EN 61000-3-2:2014	Class A	N/A
Voltage Fluctuations& Flicker	ETSI EN 301 489-1 V2.1.1 Clause 8.6	EN 6000-3-3:2013	/	N/A
EMC Immunity				
Test Items	Standard	Basic Standard	Performance Criteria	Results
Electrostatic Discharge	ETSI EN 301 489-1 V2.1.1 Clause 9.3	EN 61000-4-2:2009	B	PASS
RF Electromagnetic Field	ETSI EN 301 489-1 V2.1.1 Clause 9.2	EN 61000-4-3:2006 +A1:2008+A2:2010	A	PASS
Fast transients, common mode	ETSI EN 301 489-1 V2.1.1 Clause 9.4	EN 61000-4-4:2012	B	N/A
Surges	ETSI EN 301 489-1 V2.1.1 Clause 9.8	EN 61000-4-5:2014	B	N/A
Radio frequency, common mode	ETSI EN 301 489-1 V2.1.1 Clause 9.5	EN 61000-4-6:2014	A	N/A
Volt. Interruptions Volt. Dips	ETSI EN 301 489-1 V2.1.1 Clause 9.7	EN 61000-4-11:2004	B / C / C NOTE (3)	N/A
NOTE:				
	(1) " N/A" denotes test is not applicable in this Test Report			
	(2) Alternatively, for equipment intended to be used exclusively in an industrial environment or a telecommunication centre, the class A limits may be used.			
	(3) Voltage dip: 100% reduction – Performance Criteria B			
	Voltage dip: 100% reduction – Performance Criteria B			
	Voltage dip: 70% reduction – Performance Criteria C			
	Voltage Interruption: 0% Interruption – Performance Criteria C			

3. Emission Test

3.1. Conducted Emission Test at Main Ports

3.1.1. Test Standard and Limit

Test Standard	ETSI EN 301 489-1 V2.1.1 Clause 8.3 & 8.4
Basic Standard	EN 55032: 2015

Limits for conducted emissions


Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: *Decreasing linearly with logarithm of the frequency.

Limits for conducted emissions of equipment
intended to be used in telecommunication centres and industrial environment

Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	79	66
	500kHz~30MHz	73	60

3.1.2. Test Setup

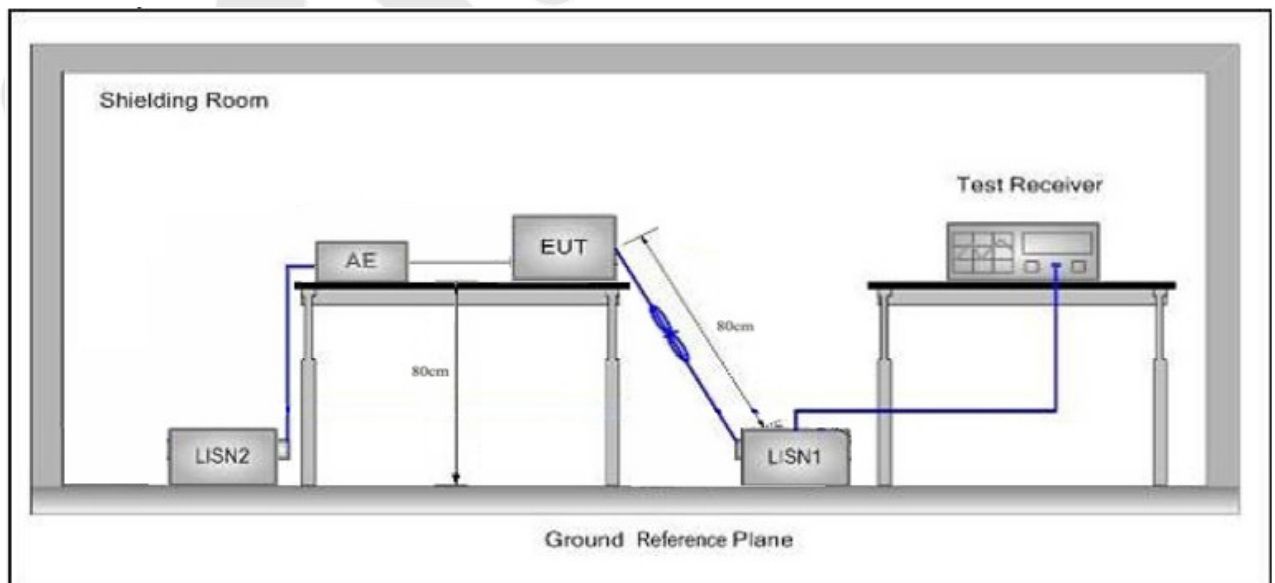

3.1.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ETSI EN 301 489-1 V2.1.1 & EN55032: 2015 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

For the actual test configuration, please refer to the related Item EUT Test Photos.

3.1.4. Test Data


PASS

The EUT should be compliance to the limit of Class B

Only the worst case data was showed in the report, please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Normal Mode
Test Specification: AC 110V, 50Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%

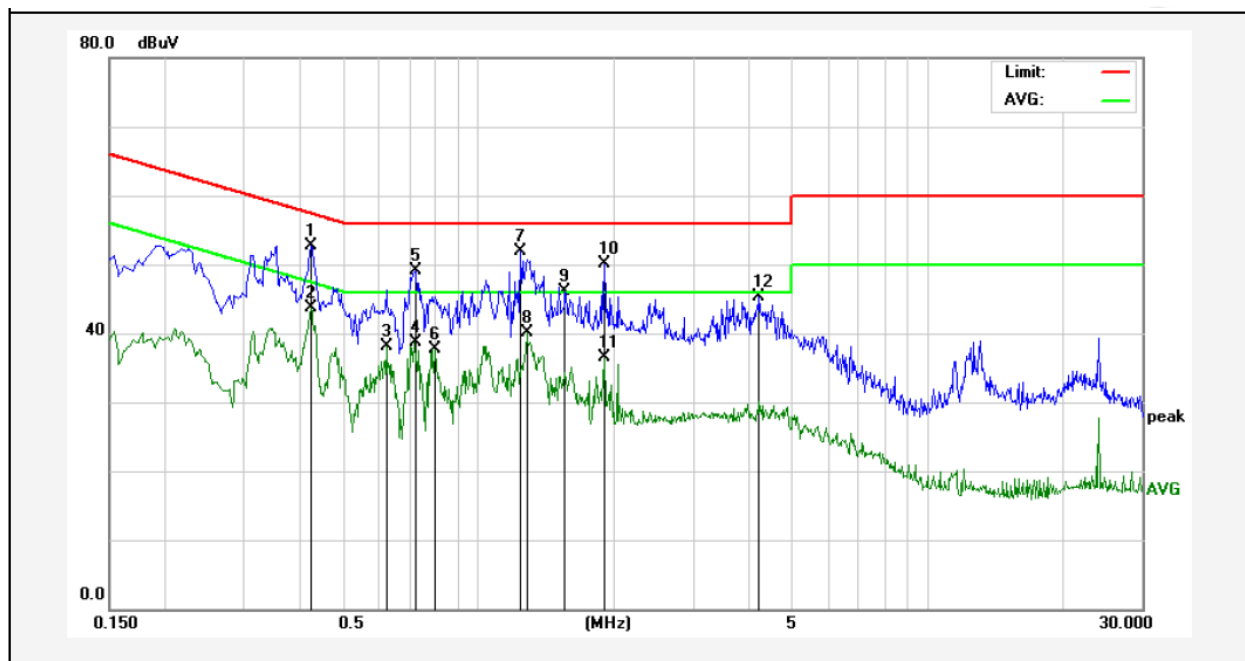

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4220	32.77	19.94	52.71	57.41	-4.70	QP	
2	0.4220	23.84	19.94	43.78	47.41	-3.63	AVG	
3	0.6220	18.09	20.02	38.11	46.00	-7.89	AVG	
4	0.7180	18.68	20.04	38.72	46.00	-7.28	AVG	
5	0.7220	29.07	20.05	49.12	56.00	-6.88	QP	
6	0.7980	17.66	20.07	37.73	46.00	-8.27	AVG	
7	1.2380	31.79	20.12	51.91	56.00	-4.09	QP	
8	1.2780	20.02	20.13	40.15	46.00	-5.85	AVG	
9	1.5540	25.96	20.13	46.09	56.00	-9.91	QP	
10	1.8980	29.97	20.14	50.11	56.00	-5.89	QP	
11	1.8980	16.29	20.14	36.43	46.00	-9.57	AVG	
12	4.2219	25.13	20.19	45.32	56.00	-10.68	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Normal Mode
Test Specification: AC 110V, 50Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

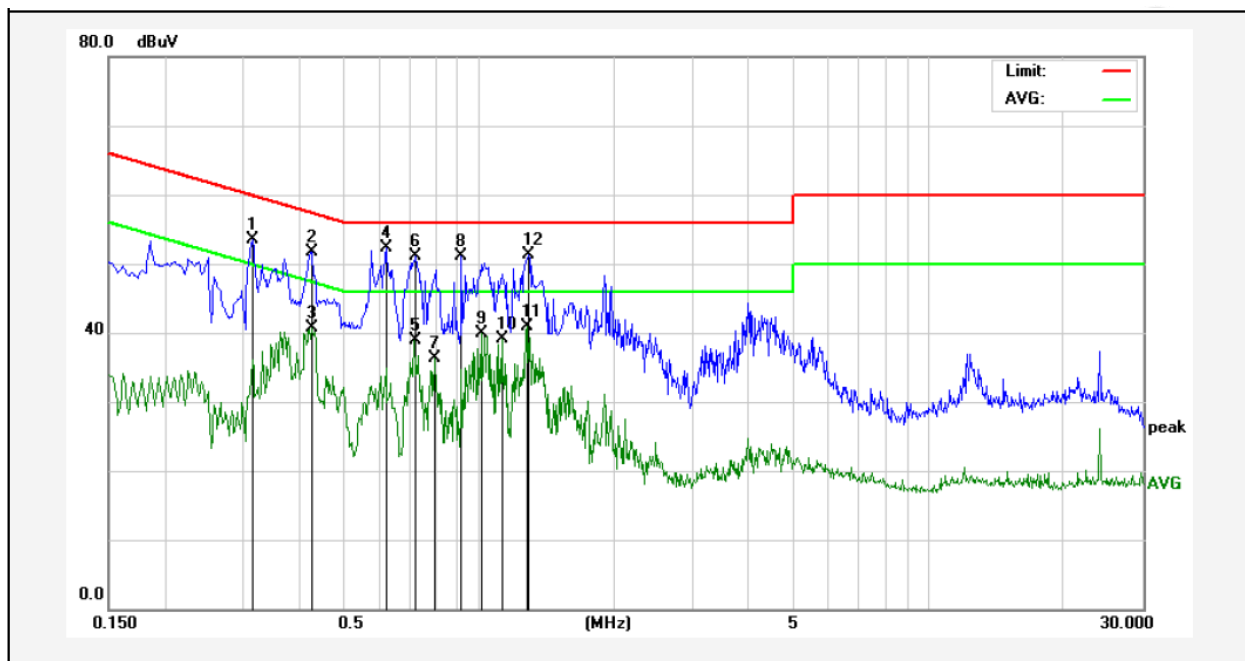

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3140	33.57	19.90	53.47	59.86	-6.39	QP	
2	0.4237	31.76	19.95	51.71	57.37	-5.66	QP	
3	0.4237	20.75	19.95	40.70	47.37	-6.67	AVG	
4	0.6220	32.36	20.02	52.38	56.00	-3.62	QP	
5	0.7180	18.83	20.04	38.87	46.00	-7.13	AVG	
6	0.7260	30.96	20.05	51.01	56.00	-4.99	QP	
7	0.7980	16.20	20.07	36.27	46.00	-9.73	AVG	
8	0.9180	31.05	20.10	51.15	56.00	-4.85	QP	
9	1.0140	19.82	20.12	39.94	46.00	-6.06	AVG	
10	1.1260	18.97	20.12	39.09	46.00	-6.91	AVG	
11	1.2860	20.86	20.13	40.99	46.00	-5.01	AVG	
12	1.2900	31.12	20.13	51.25	56.00	-4.75	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Normal Mode
Test Specification: AC 230V, 50Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%

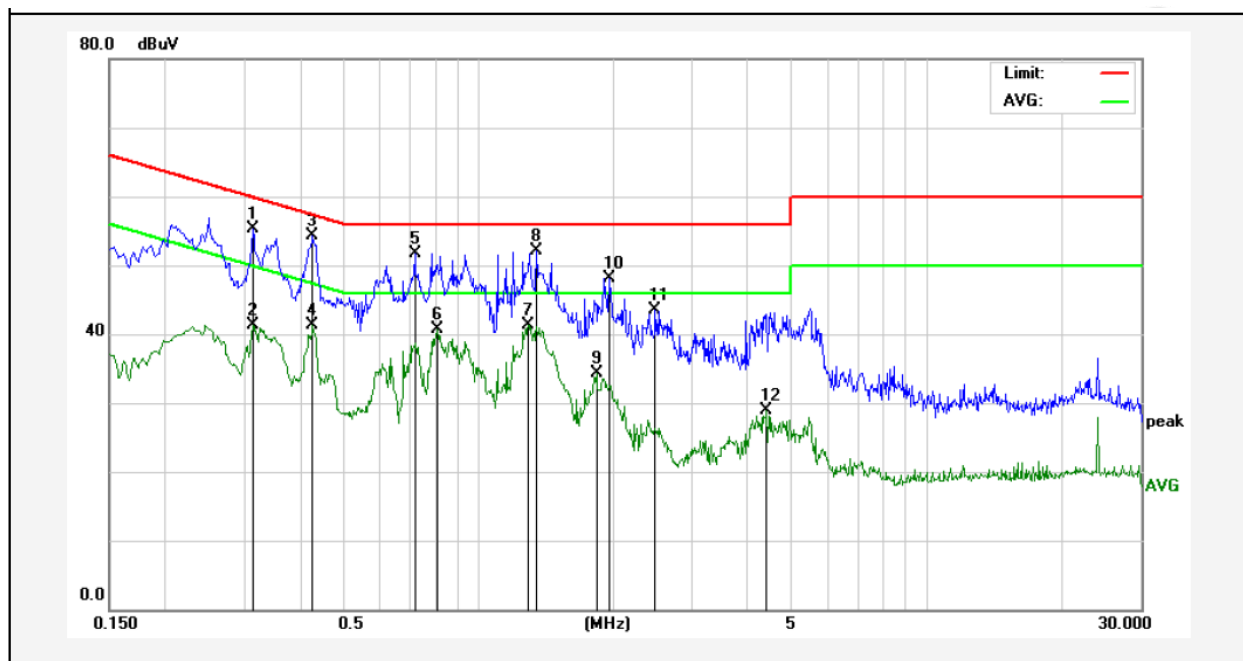

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3140	35.32	19.90	55.22	59.86	-4.64	QP	
2	0.3140	21.36	19.90	41.26	49.86	-8.60	AVG	
3	0.4259	34.30	19.95	54.25	57.33	-3.08	QP	
4	0.4259	21.39	19.95	41.34	47.33	-5.99	AVG	
5	0.7219	31.58	20.05	51.63	56.00	-4.37	QP	
6	0.8100	20.58	20.07	40.65	46.00	-5.35	AVG	
7	1.2900	21.16	20.13	41.29	46.00	-4.71	AVG	
8	1.3500	31.96	20.13	52.09	56.00	-3.91	QP	
9	1.8300	14.10	20.14	34.24	46.00	-11.76	AVG	
10	1.9539	28.00	20.14	48.14	56.00	-7.86	QP	
11	2.4739	23.31	20.15	43.46	56.00	-12.54	QP	
12	4.4058	8.63	20.19	28.82	46.00	-17.18	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Normal Mode
Test Specification: AC 230V, 50Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

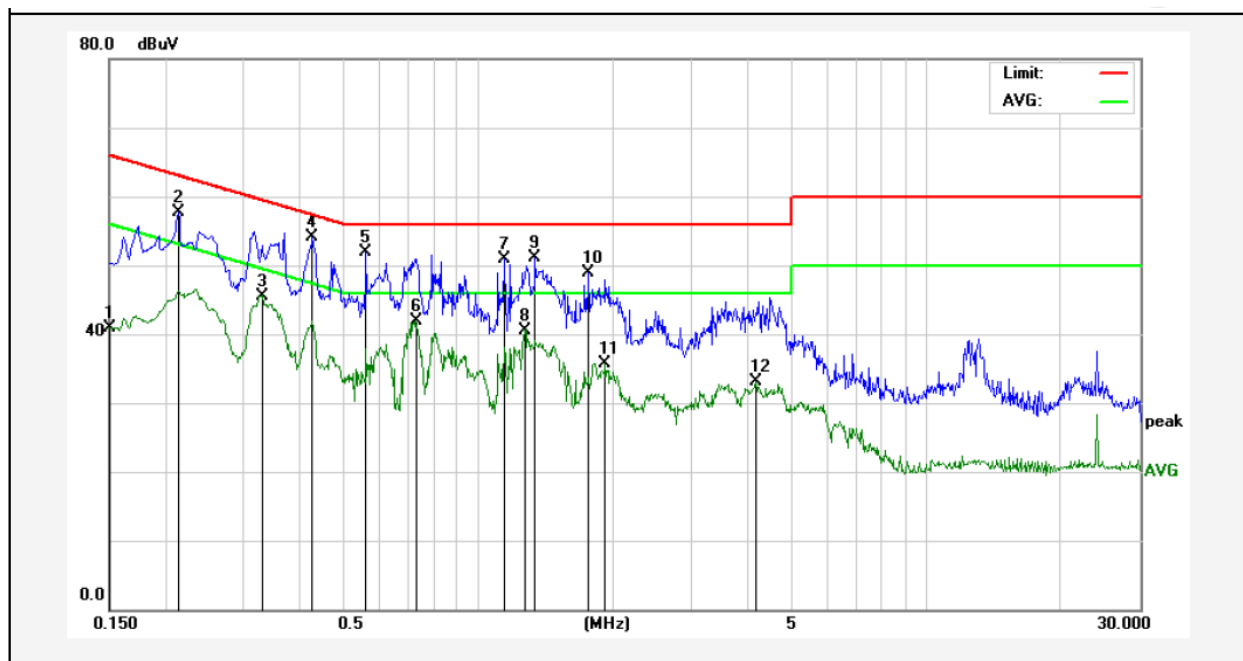

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1499	20.99	19.90	40.89	56.00	-15.11	AVG	
2	0.2140	37.90	19.90	57.80	63.04	-5.24	QP	
3	0.3302	25.70	19.90	45.60	49.44	-3.84	AVG	
4	0.4260	34.06	19.95	54.01	57.33	-3.32	QP	
5	0.5620	31.87	20.00	51.87	56.00	-4.13	QP	
6	0.7260	21.93	20.05	41.98	46.00	-4.02	AVG	
7	1.1420	30.82	20.12	50.94	56.00	-5.06	QP	
8	1.2740	20.47	20.13	40.60	46.00	-5.40	AVG	
9	1.3420	30.99	20.13	51.12	56.00	-4.88	QP	
10	1.7700	28.70	20.14	48.84	56.00	-7.16	QP	
11	1.9260	15.61	20.14	35.75	46.00	-10.25	AVG	
12	4.1579	12.85	20.18	33.03	46.00	-12.97	AVG	

3.2. Radiated Emission Test

3.2.1. Test Standard and Limit

Test Standard	ETSI EN 301 489-1 V2.1.1 Clause 8.2
Basic Standard	EN 55032: 2015

Radiated Emission Test Limit (Below 1000MHz)

Frequency (MHz)	Limit (dB μ V/m)	
	Quasi-peak Level	
	Class B	Class A
30MHz~230MHz	40	50
230MHz~1000MHz	47	57
Remark: 1. The lower limit shall apply at the transition frequency. 2. The test distance is 3m.		

Radiated Emission Test Limit (Above 1000MHz)

Frequency (MHz)	Limit (dB μ V/m)			
	Class B		Class A	
	Peak	Average	Peak	Average
1000 MHz -3000 MHz	70	50	76	56
3000 MHz -6000 MHz	74	54	80	60
Remark: 1. The lower limit applies at the transition frequency. 2. The test distance is 3m.				

Radiated Emission Test Limit for FM Receivers

Frequency (MHz)	Limit (dB μ V/m)	
	Quasi-peak Level	
	Fundamental	Harmonics
30MHz~230MHz	60	52
230MHz~300MHz	60	52
300MHz~1000MHz	60	56
Remark: 1. The lower limit shall apply at the transition frequency. 2. The test distance is 3m.		

Frequency Range of Radiated Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 6 GHz, whichever is lower

3.2.2. Test Setup

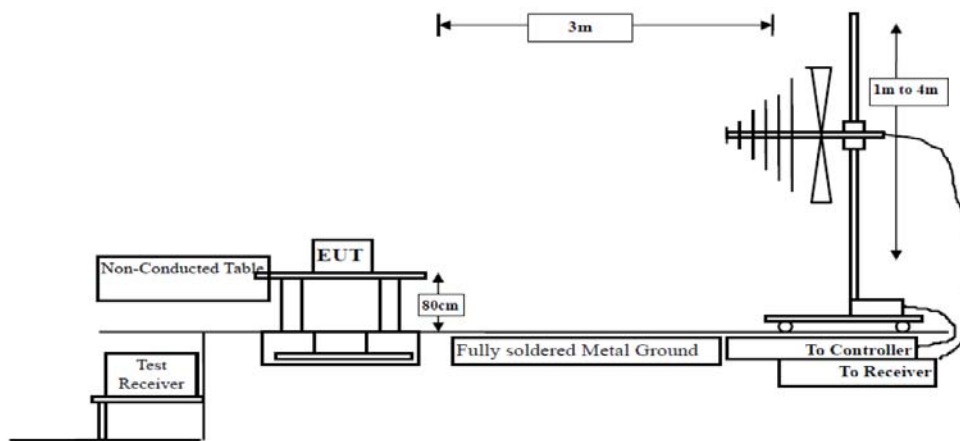


Figure 1. 30MHz to 1GHz

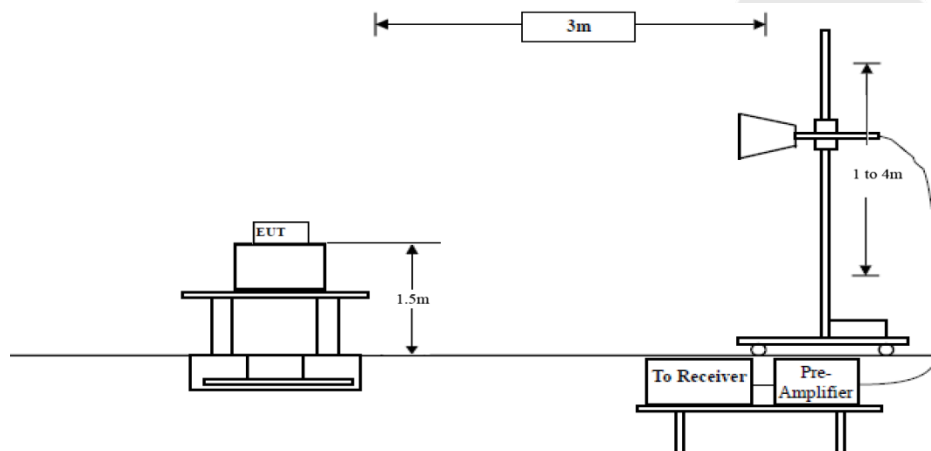


Figure 2. Above 1 GHz

3.2.3. Test Procedure

- 1) The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- 2) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- 3) The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- 6) For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at

frequency below 1GHz.

The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak/
Average detection at frequency above 1GHz.

3.2.4. Test Data

PASS


The EUT should be compliance to the limit of Class B

Only the worst case data was showed in the report, please to see the following pages

Anbotek

Test Results (30~1000MHz)


Job No.: AT0217050104W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: EN301489_Class B_3m Power Source: AC 110V, 50Hz for adapter
Test Mode: Normal Mode Polarization: Horizontal

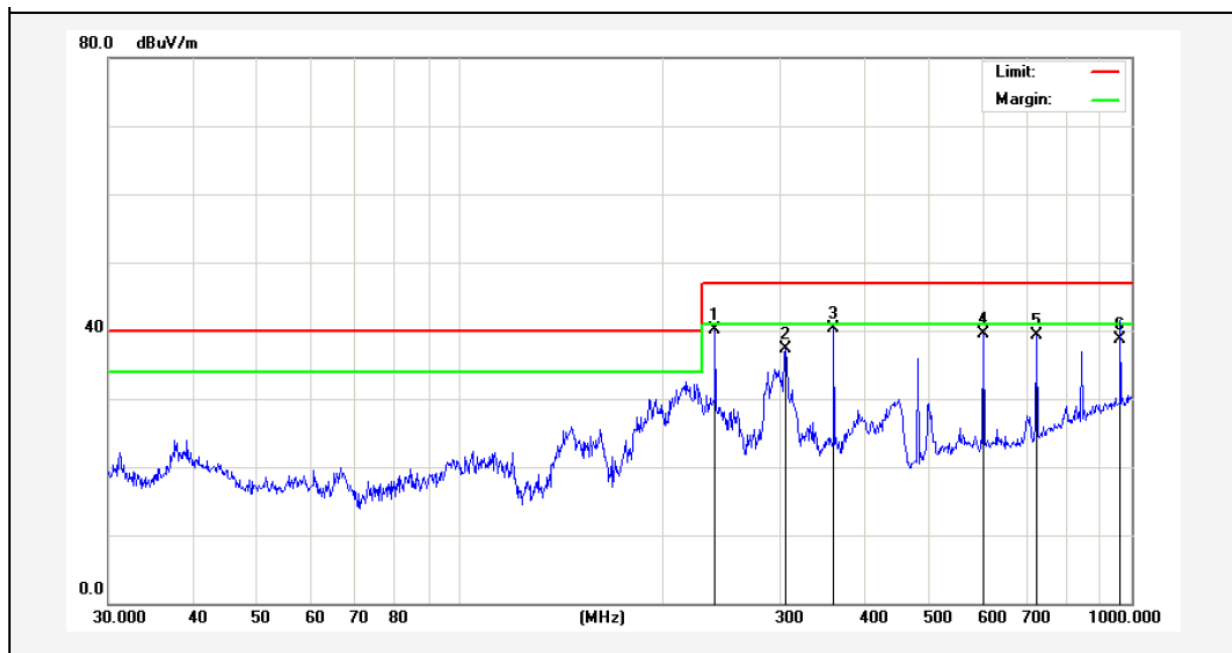

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	239.9874	58.26	-18.09	40.17	47.00	-6.83	peak			
2	305.6800	54.26	-17.00	37.26	47.00	-9.74	peak			
3	360.4476	53.87	-13.65	40.22	47.00	-6.78	peak			
4	601.4265	50.79	-11.20	39.59	47.00	-7.41	peak			
5	721.7259	47.41	-8.05	39.36	47.00	-7.64	peak			
6	959.9923	42.59	-3.80	38.79	47.00	-8.21	QP	100	0	

Test Results (30~1000MHz)


Job No.: AT0217050104W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: EN301489_Class B_3m Power Source: AC 110V, 50Hz for adapter
Test Mode: Normal Mode Polarization: Vertical

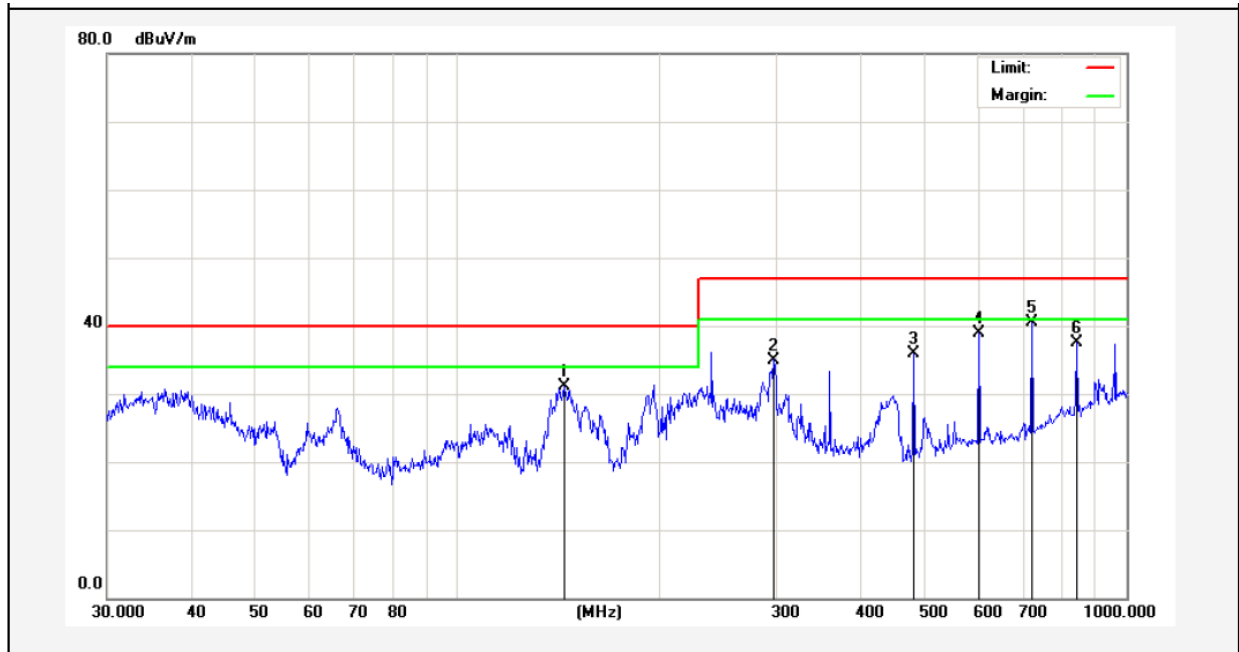

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	144.3348	49.46	-18.43	31.03	40.00	-8.97	peak			
2	297.2241	49.76	-14.76	35.00	47.00	-12.00	peak			
3	480.5276	47.53	-11.53	36.00	47.00	-11.00	peak			
4	601.4265	48.07	-9.23	38.84	47.00	-8.16	peak			
5	721.7259	48.25	-7.83	40.42	47.00	-6.58	peak			
6	842.1296	42.22	-4.77	37.45	47.00	-9.55	peak			

Test Results (30~1000MHz)


Job No.: AT0217050104W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: EN301489_Class B_3m Power Source: AC 230V, 50Hz for adapter
Test Mode: Normal Mode Polarization: Horizontal

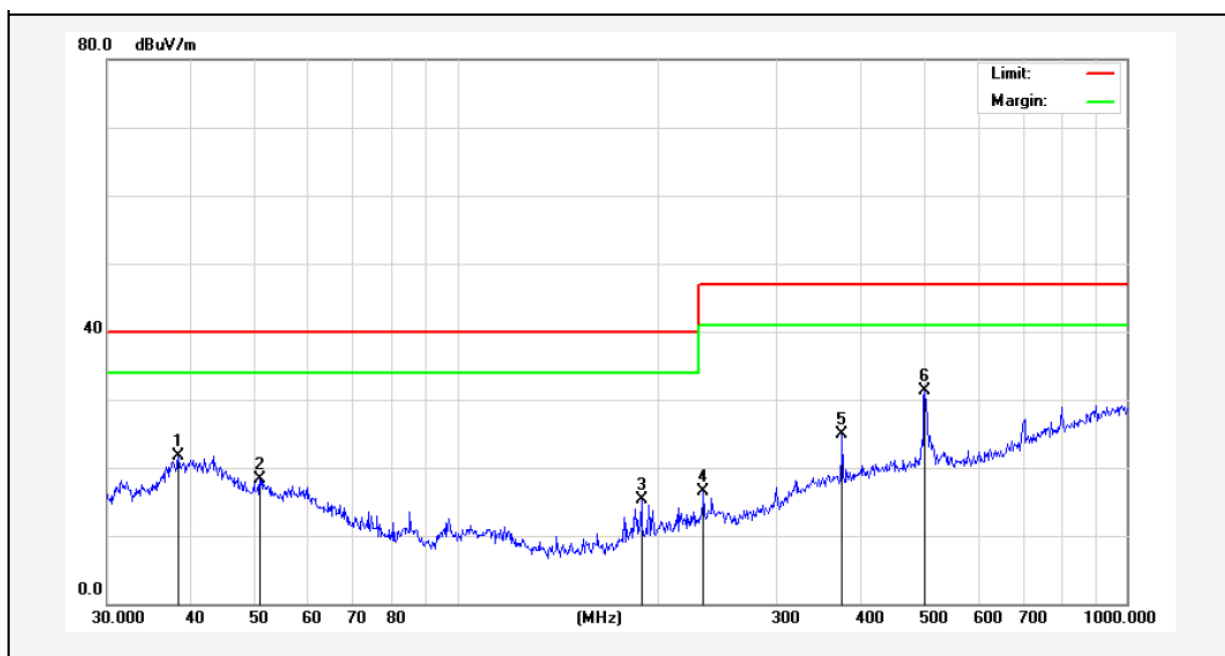

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.3462	33.45	-11.66	21.79	40.00	-18.21	peak			
2	50.7637	32.87	-14.63	18.24	40.00	-21.76	peak			
3	188.4125	36.39	-21.07	15.32	40.00	-24.68	peak			
4	233.3487	35.17	-18.76	16.41	47.00	-30.59	peak			
5	375.9385	38.34	-13.35	24.99	47.00	-22.01	peak			
6	499.4247	42.17	-10.96	31.21	47.00	-15.79	peak			

Test Results (30~1000MHz)

Job No.: AT0217050104W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: EN301489_Class B_3m Power Source: AC 230V, 50Hz for adapter
Test Mode: Normal Mode Polarization: Vertical

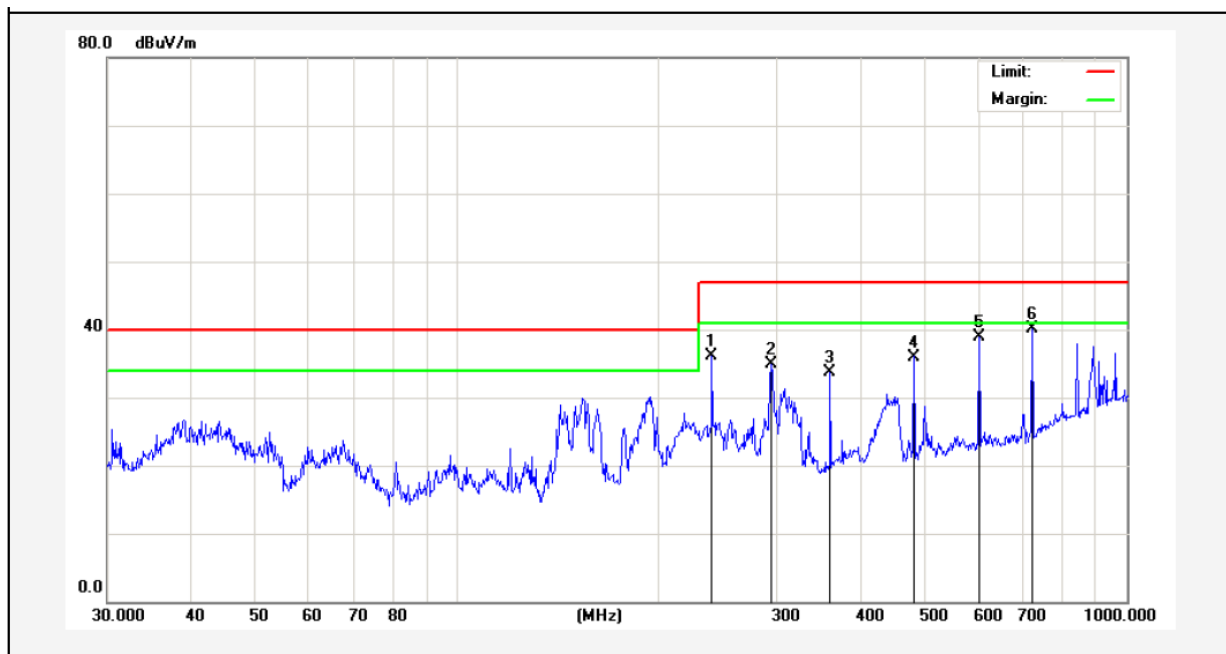

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	239.9874	50.22	-14.09	36.13	47.00	-10.87	peak			
2	294.1137	49.70	-14.84	34.86	47.00	-12.14	peak			
3	360.4476	46.41	-12.65	33.76	47.00	-13.24	peak			
4	480.5276	47.53	-11.53	36.00	47.00	-11.00	peak			
5	601.4265	48.20	-9.23	38.97	47.00	-8.03	peak			
6	721.7259	47.97	-7.83	40.14	47.00	-6.86	peak			

Test Results (1GHz~6GHz)

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
1510.04	55.37	-2.88	52.49	70.00	-17.51	H	PEAK
1925.07	53.36	-2.70	50.66	70.00	-19.34	H	PEAK
2114.54	49.11	-4.19	44.92	70.00	-25.08	H	PEAK
4091.72	49.05	-4.80	44.25	74.00	-29.75	H	PEAK
4550.80	51.32	-5.38	45.94	74.00	-28.06	H	PEAK
5172.36	53.94	-6.06	47.88	74.00	-26.12	H	PEAK
1510.04	39.09	-2.88	36.21	50.00	-13.79	H	AVG
1925.07	39.94	-2.70	37.24	50.00	-12.76	H	AVG
2114.54	39.47	-4.19	35.29	50.00	-14.71	H	AVG
4091.72	41.88	-4.80	37.08	54.00	-16.92	H	AVG
4550.80	40.31	-5.38	34.94	54.00	-19.06	H	AVG
5172.36	37.53	-6.06	31.47	54.00	-22.53	H	AVG
1415.68	50.78	-2.78	48.01	70.00	-21.99	V	PEAK
1943.82	54.34	-3.20	51.13	70.00	-18.87	V	PEAK
1935.06	52.22	-4.39	47.83	70.00	-22.17	V	PEAK
4009.95	46.62	-5.13	41.49	74.00	-32.51	V	PEAK
4365.50	51.86	-5.20	46.67	74.00	-27.33	V	PEAK
5029.98	48.64	-5.37	43.27	74.00	-30.73	V	PEAK
1415.68	40.01	-2.78	37.23	50.00	-12.77	V	AVG
1943.82	42.52	-3.20	39.32	50.00	-10.68	V	AVG
1935.06	38.72	-4.39	34.32	50.00	-15.68	V	AVG
4009.95	45.64	-5.13	40.51	54.00	-13.49	V	AVG
4365.50	41.35	-5.20	36.16	54.00	-17.84	V	AVG
5029.98	43.38	-5.37	38.01	54.00	-15.99	V	AVG

Remark:

1. Level =Receiver Read level + Antenna Factor

4. Immunity Test

General Performance Criteria

◆ Performance criteria for continuous phenomena applied to transmitters and receivers (CT/CR)

During and after the test, the apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer when the apparatus is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.

During the test the EUT shall not unintentionally transmit or change its actual operating state and stored data.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

◆ Performance criteria for transient phenomena applied to transmitters and receivers (TT/TR)

After the test, the apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer, when the apparatus is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance.

During the EMC exposure to an electromagnetic phenomenon, a degradation of performance is, however, allowed. No change of the actual mode of operation (e.g. unintended transmission) or stored data is allowed.

If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

◆ Performance criteria for equipment which does not provide a continuous communication link

For radio equipment which does not provide a continuous communication link, the performance criteria described in CT/CR and TT/TR are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests.

The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in CT/CR and TT/TR.

◆ Performance criteria for ancillary equipment tested on a stand alone basis

If ancillary equipment is intended to be tested on a stand alone basis, the performance criteria described in CT/CR and TT/TR are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests.


The performance criteria specified by the manufacturer shall give the same degree of immunity protection as called for in CT/CR and TT/TR.

4.1. Electrostatic Discharge Test

4.1.1. Test Standard and Specification

Test Standard	ETSI EN 301 489-1 V2.1.1 Clause 9.3
Basic Standard	EN 61000-4-2:2009
Discharge Impedance:	330 ohm / 150 pF
Performance Criterion:	CT/CR
Discharge Voltage:	Air Discharge: 2kV/4kV/8kV
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

4.1.2. Test Setup

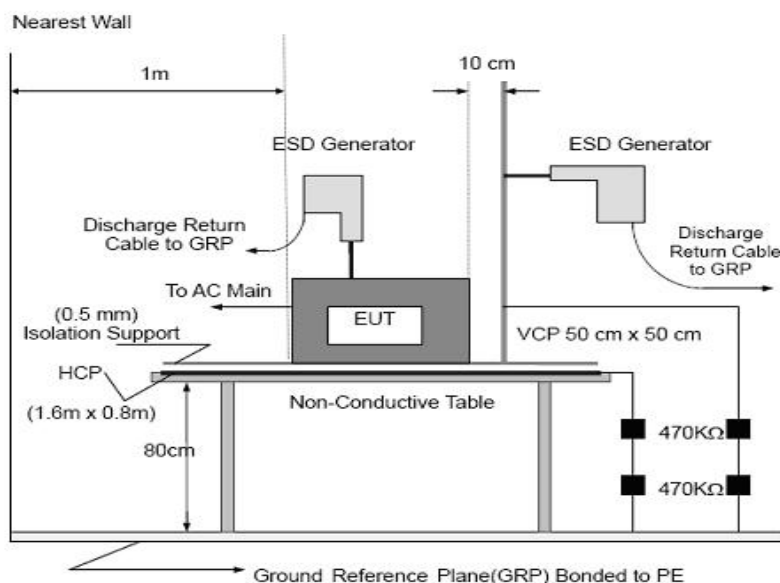

Note:

TABLE-TOP EQUIPMENT:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940kohm total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT:

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2,

and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

4.1.3. Test Procedure

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- 1) Contact discharge was applied to conductive surfaces and coupling planes of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

- 2) Air discharges at insulation surfaces of the EUT.

It was at least ten single discharges with positive and negative at the same selected point.

- 3) For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4. Test Data

Job No.: AT0217050104W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: EN61000-4-2 Power Source: AC 230V, 50Hz for adapter
Test Mode: Normal Mode

Item	Contact Discharge to conducted surfaces and to coupling planes		Air Discharge at insulating surfaces
	Direct Contact Discharge	Indirect Contact Discharge	
Test Voltage	Reaction of EUT / Result	Reaction of EUT / Result	Reaction of EUT / Result
+2kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
-2kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
+4kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
-4kV	n.r.r. PASS	n.r.r. PASS	n.r.r. PASS
+6kV	-	-	n.r.r. PASS
-6kV	-	-	n.r.r. PASS
+8kV	-	-	n.r.r. PASS
-8kV	-	-	n.r.r. PASS

Remarks: n.r.r. = no reaction recognized


Performance Criteria A observed and No any function degraded during the tests.

4.2. Radiated, RF Electromagnetic Fields Test

4.2.1. Test Standard and Specification

Test Standard	ETSI EN 301 489-1 V2.1.1 Clause 9.2
Basic Standard	EN 61000-4-3: 2006+A1:2008+A2:2010
Required Performance	A
Frequency Range	80MHz to 6GHz
Field Strength	3 V/m
Modulation	1kHz Sine Wave, 80%, AM Modulation
Frequency Step	1 % of preceding frequency value
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.5 m
Dwell Time	at least 3 seconds

4.2.2. Test Setup

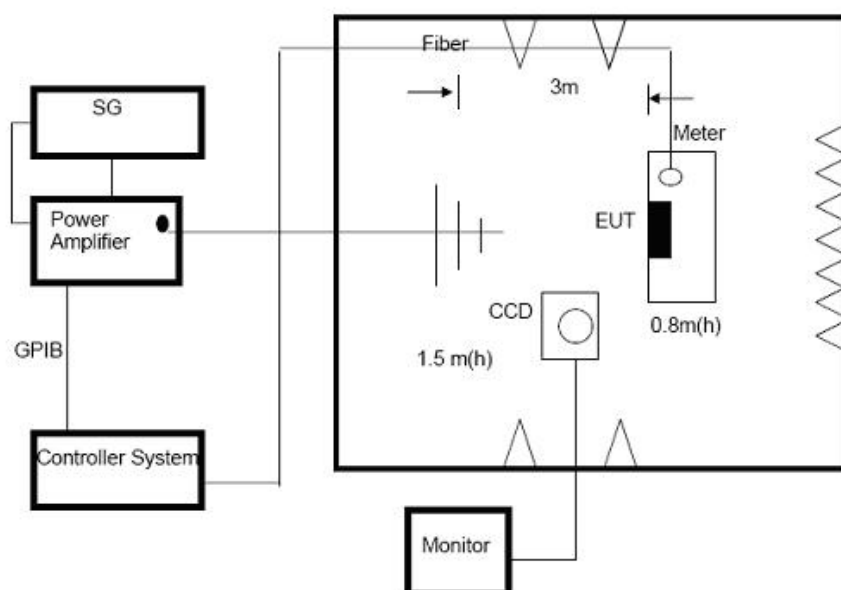

4.2.3. Test Procedure

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber. The testing distance from antenna to the EUT was 3 meters.

- 1) The field strength level was 3V/m
- 2) The frequency range is swept from 80 MHz to 6000 MHz with the signal 80%amplitude modulated with a 1kHz sine wave.
- 3) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond, but shall in no case be less than 0.5s.

4) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

4.2.4. Test Data

Job No.: AT0217050104W Temp.(°C)/Hum. (%RH): 24.3°C/55%RH
Standard: EN61000-4-3 Power Source: AC 230V, 50Hz for adapter
Test Mode: Normal Mode

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Observation	Perform. Criteria	Results
80~6000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	CT,CR	A	PASS
			Rear			
			Left			
			Right			

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Test



Photo of Radiation Emission Test

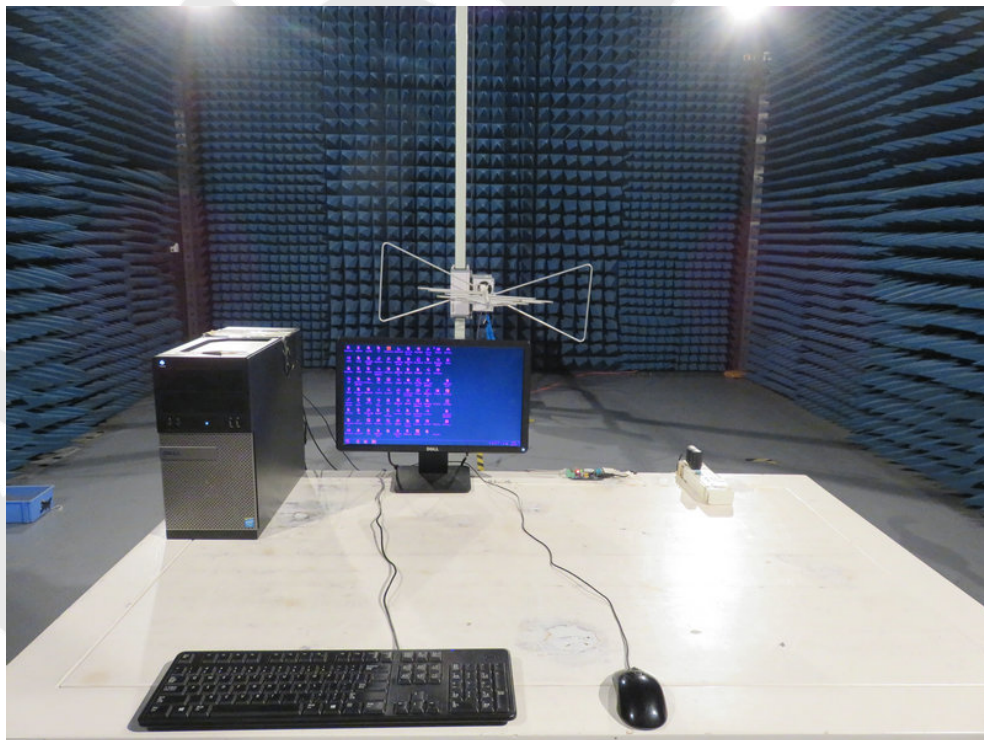



Photo of Electrostatic Discharge Test



Photo of RF Field Strength Susceptibility Test



APPENDIX II -- EXTERNAL PHOTOGRAPH

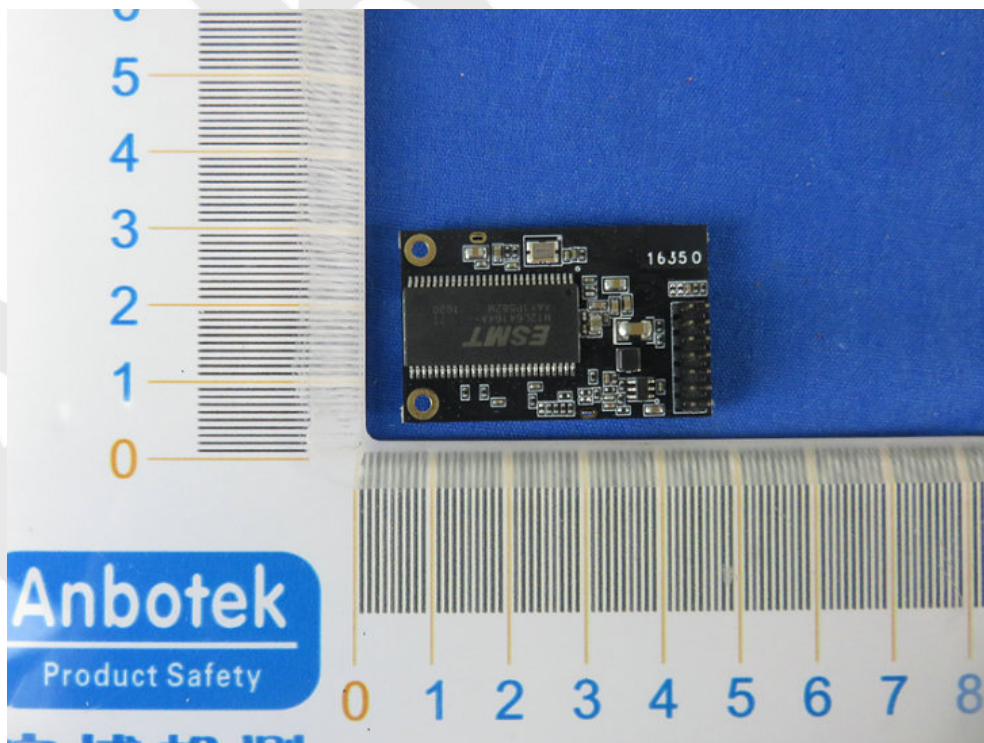

APPENDIX III -- INTERNAL PHOTOGRAPH

